




- **TERRACOTTA**
- **QUARRY TILES**
- **UNPOLISHED STONE AND AGGLOMERATES**

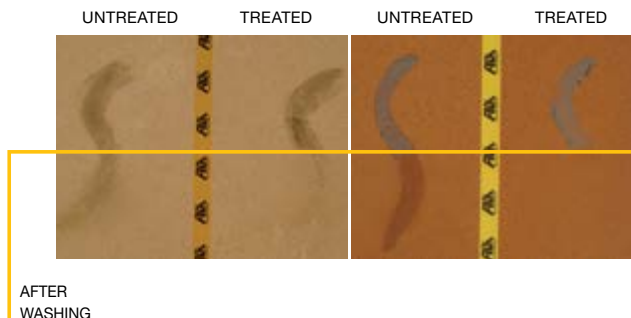

Stain-proofing test carried out on Vicenza stone and terracotta. The untreated section absorbed the grout deep down, which made it difficult to clean after laying. The treated part did not absorb the grout and it was easy to remove with the specific detergent.

### WHAT IT'S FOR

- Water-based water-repellent protector against soiling that occurs when fixing. Makes grouting and cleaning easier without altering the material's appearance.
- Ideal for absorbent materials such as terracotta, quarry tiles, natural and reconstructed stone and agglomerates.

### ADVANTAGES

- Protects against grouting.
- It does not affect adhesion between grout and material.
- It makes cleaning after laying simple.
- It reduces drying times, making subsequent treatment faster.
- Does not affect the material's appearance.
- Non sacrificial.
- Easy application.
- After the application it is possible to apply any kind of protection treatment.
- This product has extremely low emissions of VOC: certified by GEV and marked by EC1<sup>Plus</sup> and helps towards gaining credits for the LEED.

### HOW TO USE IT

**No dilution required: ready to use.**

**Application:**

Shake before use. Remove any dust from the surface to be treated. Apply one coat of FILAPRW200 using an airless spray pump, avoiding any pooling. It can also be applied with a flat paintbrush or a fleece pad. Also apply to the edges of the laid material with care. Grouting can be done the day after application, taking care to sponge off the excess before it dries completely. Once thoroughly cured, wash the surface using the most suitable detergent for the kind of material used. Assess which type of subsequent protective treatment to complete the protection cycle.

**Caution:**

Carry out a patch test on a small surface area to check for any changes in colour. Do not apply the product externally if rain is forecast.

#### COVERAGE

With one litre:

Terracotta rustic Tuscan, polished	15/20 m <sup>2</sup>
Terracotta handmade, Spanish, hollow tile, brick	7/10 m <sup>2</sup>
Pietra	10/20 m <sup>2</sup>

"Coverage shown is for guidance purposes only and refers to single coats"

#### Packaging

1 litre cans in boxes of 12.  
5-litre cans in boxes of 4.

**WARNINGS**

- Keep out of reach of children.
- Do not disperse into the environment after use.

**TEMPERATURES**  
Storage temperature: from 5° to 30° C  
The product must be applied to material with a temperature of between 10° and 30°C.

**COMPOSITION**  
A blend of resins in emulsion dispersed in water.

**LABELLING**  
No safety and risk labelling or instructions are required, as the product is not classified as hazardous under current regulations.

**TECHNICAL FEATURES**  
Appearance: liquid  
Colour: milky white  
Odour: typical of resin  
Density: 0.999 kg/l  
pH: 4.7

*This information is the result of our most up-to-date technical know-how and is based on ongoing laboratory research and testing. Nevertheless, for reasons beyond our control, any suggestions always require appropriate analysis, testing and monitoring. Fila shall not accept any responsibility for improper use of its products.*